

# GE-HT

## High Temperature - Explosion Vents Application: Exhaust Systems

### General Description

The multilayer GE-HT high-temperature explosion vent is expertly designed to protect both personnel and equipment from explosions caused by engine “misfire” or “backfire”. Engineered with precision, the HOERBIGER vent panel ensures swift, non-fragmenting deployment along with exceptional pressure relief efficiency during such events.

Additionally, HOERBIGER’S innovative design engineering, mitigates the potential of vent panel damage or even failure, due to cycling of operating pressures and vibration.

### Key Features


- Certified according international standards
- Excellent heat insulation capabilities
- High pressure relief efficiency
- Non-fragmenting opening
- Flange alignment independent
- Interchangeable with existing circular explosion vents
- Resilient to vibrations and/or pulsations

### Application

Explosions can occur in the exhaust systems of combustion engines, as well as in the downstream piping system, when low flash point fuels are used.

The combination of engine misfire or backfire prevention and the use of explosion vents is a proven way to mitigate equipment damage from overpressure, and help prevent injury to personnel.


Exterior Facing View

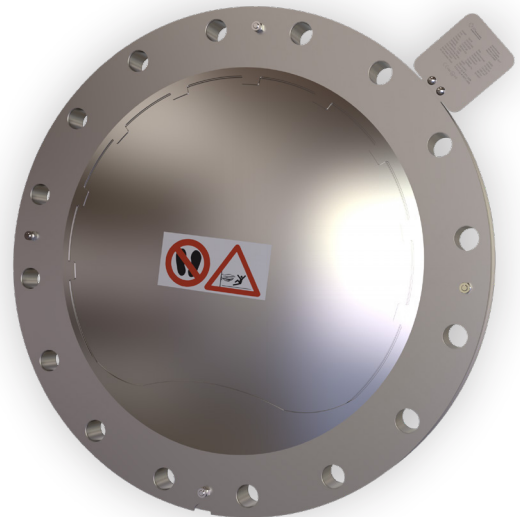


Exterior Side Facing View



Vessel Facing View

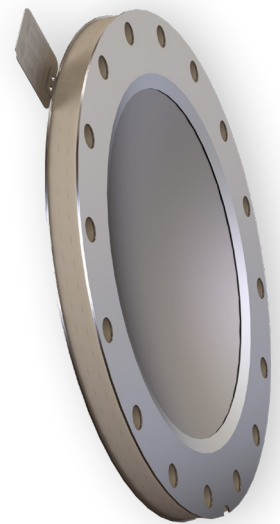

## Dimensional Overview

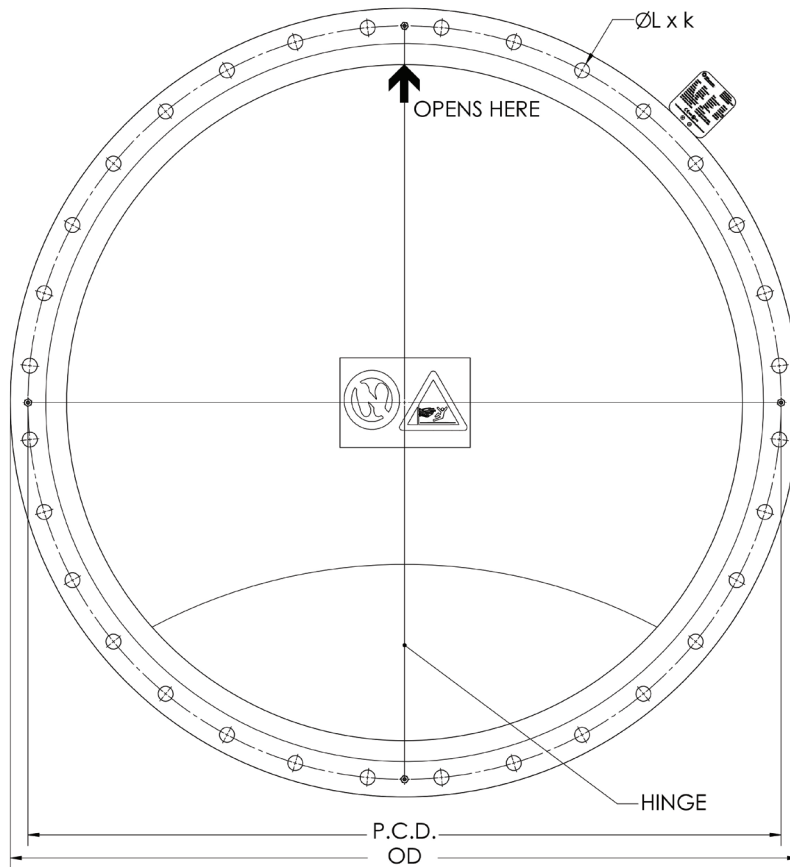

GE-HT					
DN*	OD [mm]	P.C.D. [mm]	L [mm]	k QTY	GEOM. VENT AERA [cm <sup>2</sup> ]
400	540	495	24	16	1320
600	744	700	24	20	2961
700	844	800	24	24	4026
800	952	900	24	24	5255
1000	1162	1110	24	32	8203

\*Connection flange based on DIN86044, other flange standards are available on request.

## Accessories

- Counter Flange - Available on request
- Installation Flange - Available on request
- Opening Detection - Available on request

## Contact Information

### Europe, UK, Africa & Middle East:

HOERBIGER Wien  
 T: +43 1 22440 2290  
 Sales.ev@hoerbiger.com

### China:

HOERBIGER (Shanghai) Co., Ltd.  
 Tel: 0086-21 6485 0855 Ext. 8851  
 info-cn-safety@hoerbiger.com

### North & South America:

IEP Technologies  
 T: +1413.896.1485  
 info@ieptechnologies.com

### Japan:

HOERBIGER NIPPON K.K.  
 T +81 476-37-3762  
 info-hnkk-oem@hoerbiger.com

### Korea:

HOERBIGER Korea Ltd.  
 T: +82-2-431-5867  
 info-hsk@hoerbiger.com



HOERBIGER Wien GmbH  
 Seestadtstraße 25, 1220  
 Vienna, Austria  
 www.hoerbiger.com